


- ⬇ : 3,70 m
- ∅ : 2,20 m
- ↔ : 2,00 m tot 8,00 m

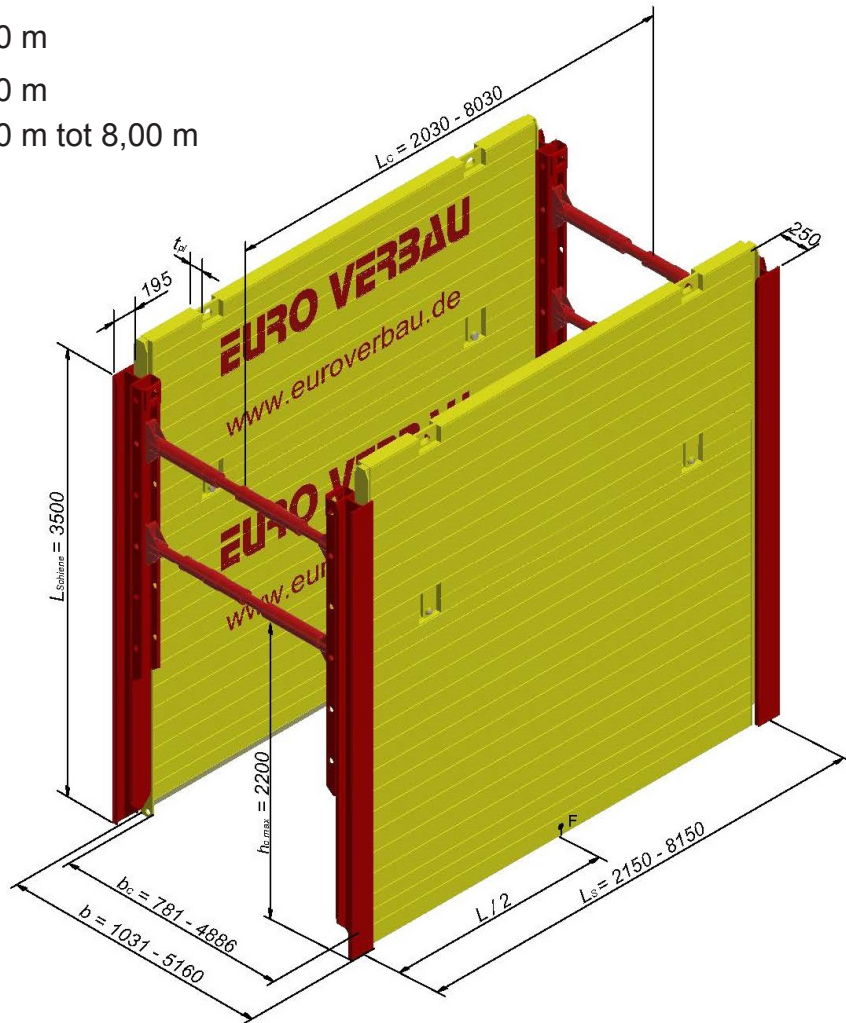

	Dimension [mm]	Weight [kg]	Bending Moment side rail B_k [kN/m]	Pipe clearance h_c [mm]
Slide Rail	$L_{Slide\ Rail}$			
EG FP 3500	3500	198	120	2200

Base Panel	Pipe Inlay Length L_c [mm]	Segment Length L [mm]
KRI / KRA 8000	8030	8150
KRI / KRA 7000	7030	7150
KRI / KRA 6000	6030	6150
KRI / KRA 5000	5030	5150
KRI / KRA 4500	4530	4650
KRI / KRA 4000	4030	4150
KRI / KRA 3500	3530	3650
KRI / KRA 3000	3030	3150
KRI / KRA 2500	2530	2650
KRI / KRA 2000	2030	2150

Spindle SP SB

Type 110 x 550

Type 110 x 700

Spindle SP SB Type 110x550							
Length Extension	Outside Dimension b [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	1122 - 1275	1097 - 1250	1033 - 1186	1137 - 1290	1033 - 1186	1161 - 1314	1065 - 1218
300	1422 - 1575	1397 - 1550	1333 - 1486	1437 - 1590	1333 - 1486	1461 - 1614	1365 - 1518
500	1622 - 1775	1597 - 1750	1533 - 1686	1637 - 1790	1533 - 1686	1661 - 1814	1565 - 1718
1000	2122 - 2275	2097 - 2250	2033 - 2186	2137 - 2290	2033 - 2186	2161 - 2314	2065 - 2218
1500	2622 - 2775	2597 - 2750	2533 - 2686	2637 - 2790	2533 - 2686	2661 - 2814	2565 - 2718
2000	3122 - 3275	3097 - 3250	3033 - 3186	3137 - 3290	3033 - 3186	3161 - 3314	3065 - 3218
2500	3622 - 3775	3597 - 3750	3533 - 3686	3637 - 3790	3533 - 3686	3661 - 3814	3565 - 3718
Length Extension	Working Width b _c [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	622 - 775	887 - 1040	823 - 976	887 - 1040	783 - 936	861 - 1014	765 - 918
300	922 - 1075	1187 - 1340	1123 - 1276	1187 - 1340	1083 - 1236	1161 - 1314	1065 - 1218
500	1122 - 1275	1387 - 1540	1323 - 1476	1387 - 1540	1283 - 1436	1361 - 1514	1265 - 1418
1000	1622 - 1775	1887 - 2040	1823 - 1976	1887 - 2040	1783 - 1936	1861 - 2014	1765 - 1918
1500	2122 - 2275	2387 - 2540	2323 - 2476	2387 - 2540	2283 - 2436	2361 - 2514	2265 - 2418
2000	2622 - 2775	2887 - 3040	2823 - 2976	2887 - 3040	2783 - 2936	2861 - 3014	2765 - 2918
2500	3122 - 3275	3387 - 3540	3323 - 3476	3387 - 3540	3283 - 3436	3361 - 3514	3265 - 3418
Spindle SP SB Type 110x700							
Length Extension	Outside Dimension b [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	1298 - 1578	1273 - 1553	1209 - 1489	1313 - 1593	1209 - 1489	1337 - 1617	1241 - 1521
300	1598 - 1878	1573 - 1853	1509 - 1789	1613 - 1893	1509 - 1789	1637 - 1917	1541 - 1821
500	1798 - 2078	1773 - 2053	1709 - 1989	1813 - 2093	1709 - 1989	1837 - 2117	1741 - 2021
1000	2298 - 2578	2273 - 2553	2209 - 2489	2313 - 2593	2209 - 2489	2337 - 2617	2241 - 2521
1500	2798 - 3078	2773 - 3053	2709 - 2989	2813 - 3093	2709 - 2989	2837 - 3117	2741 - 3021
2000	3298 - 3578	3273 - 3553	3209 - 3489	3313 - 3593	3209 - 3489	3337 - 3617	3241 - 3521
2500	3798 - 4078	3773 - 4053	3709 - 3989	3813 - 4093	3709 - 3989	3837 - 4117	3741 - 4021
Length Extension	Working Width b _c [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	798 - 1078	1063 - 1343	999 - 1279	1063 - 1343	959 - 1239	1037 - 1317	941 - 1221
300	1098 - 1378	1363 - 1643	1299 - 1579	1363 - 1643	1259 - 1539	1337 - 1617	1241 - 1521
500	1298 - 1578	1563 - 1843	1499 - 1779	1563 - 1843	1459 - 1739	1537 - 1817	1441 - 1721
1000	1798 - 2078	2063 - 2343	1999 - 2279	2063 - 2343	1959 - 2239	2037 - 2317	1941 - 2221
1500	2298 - 2578	2563 - 2843	2499 - 2779	2563 - 2843	2459 - 2739	2537 - 2817	2441 - 2721
2000	2798 - 3078	3063 - 3343	2699 - 3279	3063 - 3343	2959 - 3239	3037 - 3317	2941 - 3221
2500	3298 - 3578	3563 - 3843	3499 - 3779	3563 - 3843	3459 - 3739	3537 - 3817	3441 - 3721

Spindle SP SB

Type C 98 x 550
Type B 98 x 700

Spindle SP SB Type C 98x550							
Length Extension	Outside dimension b [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	1120 - 1320	1095 - 1295	1031 - 1231	1135 - 1335	1031 - 1231	1159 - 1359	1063 - 1263
300	1420 - 1620	1395 - 1595	1331 - 1531	1435 - 1635	1331 - 1531	1459 - 1659	1363 - 1563
500	1620 - 1820	1595 - 1795	1531 - 1731	1635 - 1835	1531 - 1731	1659 - 1859	1563 - 1763
1000	2120 - 2320	2095 - 2295	2031 - 2231	2135 - 2335	2031 - 2231	2159 - 2359	2063 - 2263
1500	2620 - 2820	2595 - 2795	2531 - 2731	2635 - 2835	2531 - 2731	2659 - 2859	2563 - 2763
2000	3120 - 3320	3095 - 3295	3031 - 3231	3135 - 3335	3031 - 3231	3159 - 3359	3063 - 3263
2500	3620 - 3820	3595 - 3795	3531 - 3731	3635 - 3835	3531 - 3731	3659 - 3859	3563 - 3763
Length Extension	Working Width b _c [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	620 - 820	885 - 1085	821 - 1021	885 - 1085	781 - 981	859 - 1059	763 - 963
300	920 - 1120	1185 - 1385	1121 - 1321	1185 - 1385	1081 - 1281	1159 - 1359	1063 - 1263
500	1120 - 1320	1385 - 1585	1321 - 1521	1385 - 1585	1281 - 1481	1359 - 1559	1263 - 1463
1000	1620 - 1820	1885 - 2085	1821 - 2021	1885 - 2085	1781 - 1981	1859 - 2059	1763 - 1963
1500	2120 - 2320	2385 - 2585	2321 - 2521	2385 - 2585	2281 - 2481	2359 - 2559	2263 - 2463
2000	2620 - 2820	2885 - 3085	2821 - 3021	2885 - 3085	2781 - 2981	2859 - 3059	2763 - 2963
2500	3120 - 3320	3385 - 3585	3321 - 3521	3385 - 3585	3281 - 3481	3359 - 3559	3263 - 3463
Spindle SP SB Type B 98x700							
Length Extension	Outside Dimension b [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	1296 - 1636	1271 - 1611	1207 - 1547	1311 - 1651	1207 - 1547	1335 - 1675	1239 - 1579
300	1596 - 1936	1571 - 1911	1507 - 1847	1611 - 1951	1507 - 1847	1635 - 1975	1539 - 1879
500	1796 - 2136	1771 - 2111	1707 - 2047	1811 - 2151	1707 - 2047	1835 - 2175	1739 - 2079
1000	2296 - 2636	2271 - 2611	2207 - 2547	2311 - 2651	2207 - 2547	2335 - 2675	2239 - 2579
1500	2796 - 3136	2771 - 3111	2707 - 3047	2811 - 3151	2707 - 3047	2835 - 3175	2739 - 3079
2000	3296 - 3636	3271 - 3611	3207 - 3547	3311 - 3651	3207 - 3547	3335 - 3675	3239 - 3579
2500	3796 - 4136	3771 - 4111	3707 - 4047	3811 - 4151	3707 - 4047	3835 - 4175	3739 - 4079
Length Extension	Working Width b _c [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	796 - 1136	1061 - 1401	997 - 1337	1061 - 1401	957 - 1297	1035 - 1375	939 - 1279
300	1096 - 1436	1361 - 1701	1297 - 1637	1361 - 1701	1257 - 1597	1335 - 1675	1239 - 1579
500	1296 - 1636	1561 - 1901	1497 - 1837	1561 - 1901	1457 - 1797	1535 - 1875	1439 - 1779
1000	1796 - 2136	2061 - 2401	1997 - 2337	2061 - 2401	1957 - 2297	2035 - 2375	1939 - 2279
1500	2296 - 2636	2561 - 2901	2497 - 2837	2561 - 2901	2457 - 2797	2535 - 2875	2439 - 2779
2000	2796 - 3136	3061 - 3401	2697 - 3337	3061 - 3401	2957 - 3297	3075 - 3375	2939 - 3279
2500	3296 - 3636	3561 - 3901	3497 - 3837	3561 - 3901	3457 - 3797	3575 - 3875	3439 - 3779

Spindle SP SB

Type E 98 x 817

Spindle SP SB Type E 98x817							
Numbers Extensions	Outside Dimension b [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	1281 - 1681	1248 - 1648	1384 - 1584	1288 - 1688	1184 - 1584	1312 - 1712	1216 - 1616
1x500	1781 - 2181	1748 - 2148	1684 - 2084	1788 - 2188	1684 - 2084	1812 - 2212	1716 - 2116
2x500	2281 - 2681	2248 - 2648	2184 - 2584	2288 - 2688	2184 - 2584	2312 - 2712	2216 - 2616
3x500	2781 - 3181	2748 - 3148	2684 - 3084	2788 - 3188	2684 - 3084	2812 - 3212	2716 - 3116
4x500	3281 - 3681	3248 - 3648	3184 - 3584	3288 - 3688	3184 - 3584	3312 - 3712	3216 - 3616
5x500	3781 - 4181	3748 - 4148	3684 - 4084	3788 - 4188	3684 - 4084	3812 - 4212	3716 - 4116
6x500	4281 - 4681	4248 - 4648	4184 - 4584	4288 - 4688	4184 - 4584	4312 - 4712	4216 - 4616
7x500	4781 - 5181	4748 - 5148	4684 - 5084	4788 - 5188	4684 - 5084	4812 - 5212	4716 - 5116
Numbers Extensions	Working Width b _c [mm]						
	Rail	KRA 2000 - 3500	KRI 2000 - 3500	KRA 4000 - 7000	KRI 4000 - 7000	KRA 8000	KRI 8000
without	937 - 1337	1038 - 1438	974 - 1374	1038 - 1438	934 - 1334	1012 - 1412	916 - 1316
1x500	1437 - 1837	1538 - 1938	1474 - 1874	1538 - 1938	1334 - 1734	1512 - 1912	1416 - 1816
2x500	1937 - 2337	2038 - 2438	1974 - 2374	2038 - 2438	1834 - 2234	2012 - 2412	1916 - 2316
3x500	2437 - 2837	2538 - 2938	2474 - 2874	2538 - 2938	2334 - 2734	2512 - 2912	2416 - 2816
4x500	2937 - 3337	3038 - 3438	2974 - 3374	3038 - 3438	2834 - 3234	3012 - 3412	2916 - 3316
5x500	3437 - 3837	3538 - 3938	2474 - 3874	3538 - 3938	3334 - 3734	3512 - 3912	3416 - 3816
6x500	3937 - 4337	4038 - 4438	2974 - 4374	4038 - 4438	3834 - 4234	4012 - 4412	3916 - 4316
7x500	4437 - 4837	4538 - 4938	3474 - 4874	4538 - 4938	4334 - 4734	4512 - 4912	4416 - 4816

Article list

Article		Dimensions [mm]	Article-Nr.	Weight [kg]	Pcs.
Single Slide Rail	EG FP	3500	2003500	198	
Base Panel	KRI / KRA	2000 x 2400	3002024 i/a	552	
	KRI / KRA	2500 x 2400	3002524 i/a	662	
	KRI / KRA	3000 x 2400	3003024 i/a	772	
	KRI / KRA	3500 x 2400	3003524 i/a	882	
	KRI / KRA	4000 x 2400	3004024 i/a	1055	
	KRI / KRA	4500 x 2400	3004524 i/a	1173	
	KRI / KRA	5000 x 2400	3005024 i/a	1550	
	KRI / KRA	6000 x 2400	3006024 i/a	1901	
	KRI / KRA	7000 x 2400	3007024 i/a	3168	
	KRI / KRA	8000 x 2400	3008024 in / au	3087	
Top Panel	KR A	2000 x 1330	3002013 i/a	341	
	KR A	2500 x 1330	3002513 i/a	406	
	KR A	3000 x 1330	3003013 i/a	472	
	KR A	3500 x 1330	3003513 i/a	537	
	KR A	4000 x 1330	3004013 i/a	643	
	KR A	4500 x 1330	3004513 i/a	714	
	KR A	5000 x 1330	3005013 i/a	784	
	KR A	6000 x 1330	3006013 i/a	1641	
	KR A	7000 x 1330	3007013 i/a	1887	
	KR A	8000 x 1312	3008013 in / au	1874	
Connecting Bolt		125 x 40	2400125	1,3	
Safety Pin		92	1700092	0,05	
Spindle	SP SB	110 x 700	1810700	40	
	SP SB	110 x 550	1810550	32	
Spindle	SP SB Typ B	98 x 700	1800700	37	
	SP SB Typ C	98 x 550	1800550	26,5	
	SP SB Typ E	98 x 817	1800817	69	
Spring Spindle Holder		80	1700080	16	
Bolt		Ø40 x 212 mm	1700212	2,4	
Bolt		Ø20 x 140 mm	1700140	0,4	
Safety Pin		92	1700092	0,05	
Spindle Tool			170001g	3,7	
Protection Plate	EG SL		240EGSL	22	
Quadrupel sling		1800 x 20	170423s	39	
Quadrupel sling		2300 x 20		42	
Quadrupel sling		2800 x 20		45	
Quadrupel chain		2300 x 13		47	